

Armaturbog

**Vilvordevej**



**Arlon Sort 980lm 3000K Ra>80 Bagkantsdæmp**

EAN: 7021986536058  
SG varenr.: 653605


**Elektrisk**

Wattage: 10W  
Systemeffekt (W): 10W  
Spænding: 220-240V  
Frekvens (Hz): 50/60Hz  
Maks. antal armaturer pr. afbryder: B10: 31, B16: 50, C10: 52, C16: 85

**Lysteknik**

Lyskilde: LED  
Lyskilde inkluderet: Ja  
Lumen output: 980lm  
Effekt: 98 lm/W  
Farvetemperatur: 3000K  
Farvegengivelse (CRI): Ra>80  
MacAdams faktor: SDCM: 3  
Levetid: L80/B20>100.000  
Lysfordeling: Direkte  
Optik: Difuser  
Synligt flimrer (SVM): 0.08  
Stroboskopisk flimrer (SVM): 0.75

**Dimmertype**

Type: Bagkantsdæmp  
Driver: 350mA

**Beskyttelse**

Isolationsklasse: Klasse II

**Energi og godkendelser**

Breem: Opfylder Hea 01 for flimmerfrit lys

**Materialer og overflader**

Materiale: Aluminium  
Farve: Sort (RAL 9004)  
Afskærmningsmateriale: Polycarbonat (PC)

**Montering/Tilslutning**



Montering: Væg, Interiør / Udendørs  
Tilslutning: Klemmerække

**Dimensioner**


Længde (mm) L: 270  
Bredde (mm) W: 150  
Højde (mm) H: 47  
Vægt (kg) brutto/netto: 1.5 / 1.35

**Forpakning**

Forpakkingsstørrelse (mm): 275 x 155 x 60

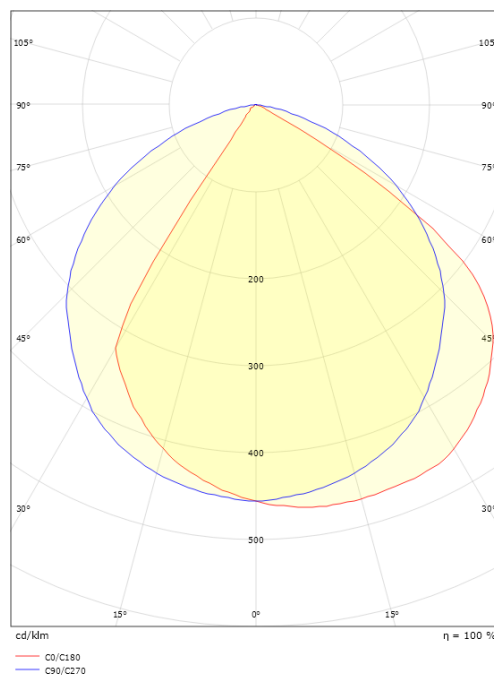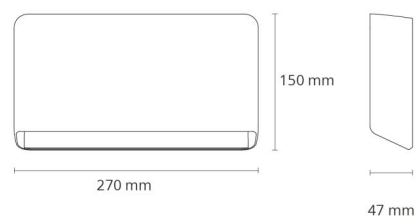

7 0 2 1 9 8 6 5 3 6 0 5 8

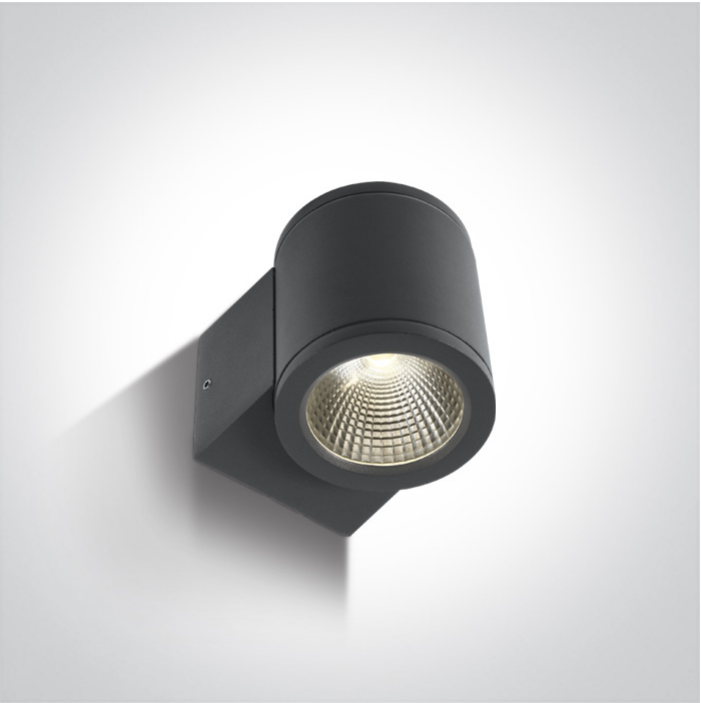

6W Outdoor Wall Cylinder, IP54.

Complete with driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

|              |                        |
|--------------|------------------------|
| Item Group   | 13 Wall & Ceiling LED  |
| Family       | Outdoor Wall Cylinders |
| Order Code   | 67138E/B/W             |
| Colour       | Black                  |
| Material     | Die Cast               |
| Shape        | Circular               |
| Height       | 90mm                   |
| Diameter     | 80mm                   |
| Surface Wall | Yes                    |
| Indoor       | Yes                    |
| Outdoor      | Yes                    |



## OUTDOOR

# ORIENT CCT SELECTABLE BOLLARD

## 20W, IP65






## PRODUCT INFORMATION DOCUMENT

### FEATURES

- LED replacement for 120W linear halogen fittings
- Modern and attractive design using high quality materials and technologies
- Complete with switch allowing to select 3000K and 4000K colour temperature
- Removable mounting base providing template for drilling anchor points
- Wide operating ambient temperature range of -25°C to +40°C
- Suitable for switching by PIR, Microwave or Photocell sensors

### CONSTRUCTION

- Die cast aluminium housing with PMMA diffuser
- High quality powder coating process for high corrosion resistance
- Stainless steel fixing screws




| Product Code:                      | ROR20X063-04        | ROR20X098-04        |
|------------------------------------|---------------------|---------------------|
| Comparable to:                     | 120W linear halogen | 120W linear halogen |
| Total Power (W):                   | 20.4/20.1           | 20.4/20.1           |
| Power Factor:                      | 0.95                | 0.95                |
| Total Light Output (lm):           | 1950/2020           | 1950/2020           |
| Total Emergency Light Output (lm): | NA                  | NA                  |
| Efficacy (lm/cctW):                | 96/101              | 96/101              |
| Lux at 1m (lux):                   | 180/185             | 180/185             |
| Emergency Lux at 1m (lux):         | NA                  | NA                  |
| CCT (K):                           | 3000/4000           | 3000/4000           |
| CRI:                               | 80                  | 80                  |
| IP:                                | 65                  | 65                  |
| Operation Temperature (°C):        | -25 ≤ Ta ≤ +40      | -25 ≤ Ta ≤ +40      |
| Inrush Current:                    | 4.8A/3.2us          | 4.8A/3.2us          |
| RG Value:                          | 0                   | 0                   |
| SDCM:                              | 6                   | 6                   |
| Pst LM:                            | NA                  | NA                  |
| SVM:                               | NA                  | NA                  |
| Energy Class:                      | D                   | D                   |
| Rated Life to L70B50 (Hrs):        | 50000               | 50000               |
| Dimensions ØxH (mm):               | 160x630             | 160x980             |
| Weight (kg):                       | 3.6                 | 4.9                 |

| Separate Control Gear Information |           |           |
|-----------------------------------|-----------|-----------|
| Type of Light Source:             | LED       | LED       |
| Full Load Efficiency (%):         | 88        | 88        |
| P <sub>NET</sub> (W):             | NA        | NA        |
| Dimensions (mm):                  | 120x50x31 | 120x50x31 |

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.





Fremspring (cm): 7  
Skærm diameter (cm): 22.3

### Desi 22

Nummer: 77636003 Sort

EAN: 5701581250888

DB: 1624387

Antal pr. kolli 3

Materiale: Aluminium/Plast

IP44, Klasse 1 (Jord), 230V

E27, Max. 12W, Lyskilde medfølger ikke

Parallelforbindelse muligt

Brugsområde: Udendørs

Energiklasse A++ - B

Desi er en flot og enkel plafond, der med fordel kan placeres under udhæng, på husmuren eller i skuret. Den mattede skærm gør at lyset er blødt og ikke blænder.